

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)


PCT

(10) International Publication Number
WO 2005/000589 A1

- (51) International Patent Classification⁷: **B41J 2/045**, [JP/JP]; 5-8-201, Saiwaicho, Atsugi-shi, Kanagawa, 2430012 (JP).
- (21) International Application Number: PCT/JP2004/009040 (74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo, 1506032 (JP).
- (22) International Filing Date: 21 June 2004 (21.06.2004)
- (25) Filing Language: English (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 2003-183158 26 June 2003 (26.06.2003) JP (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SHINGYOHUCHI, Mitsuru** [JP/JP]; 6-27-202, Nara 3-chome, Aoba-ku, Yokohama-shi, Kanagawa, 2270038 (JP). **OHASHI, Mikio** [JP/JP]; 11-5-201, Ohmaru, Tsuzuki-ku, Yokohama-shi, Kanagawa, 2240061 (JP). **NODA, Hiroshi**

[Continued on next page]

(54) Title: AN IMAGE FORMATION APPARATUS

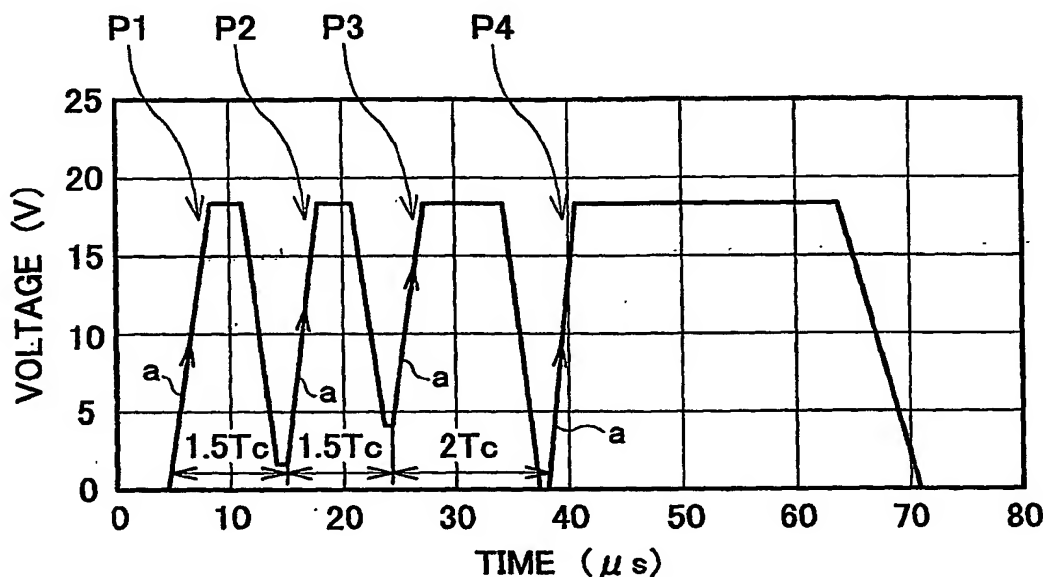

(57) Abstract: An image formation apparatus is disclosed, wherein a time interval between a first ink drop and a second ink drop is set at $1.5 \times T_c$, a time interval between the second ink drop and a third ink drop is set at $1.5 \times T_c$, and a time interval between the third ink drop and a fourth ink drop is set at $2 \times T_c$, where T_c represents the specific vibration cycle of a pressurised ink chamber.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.